


Belts

BRICQ-DRY

This modern needled belt was developed for the new generation of high speed machines. Its high permeability enhances the flatness and quality of board and its reinforced structure provides positive lifetimes.

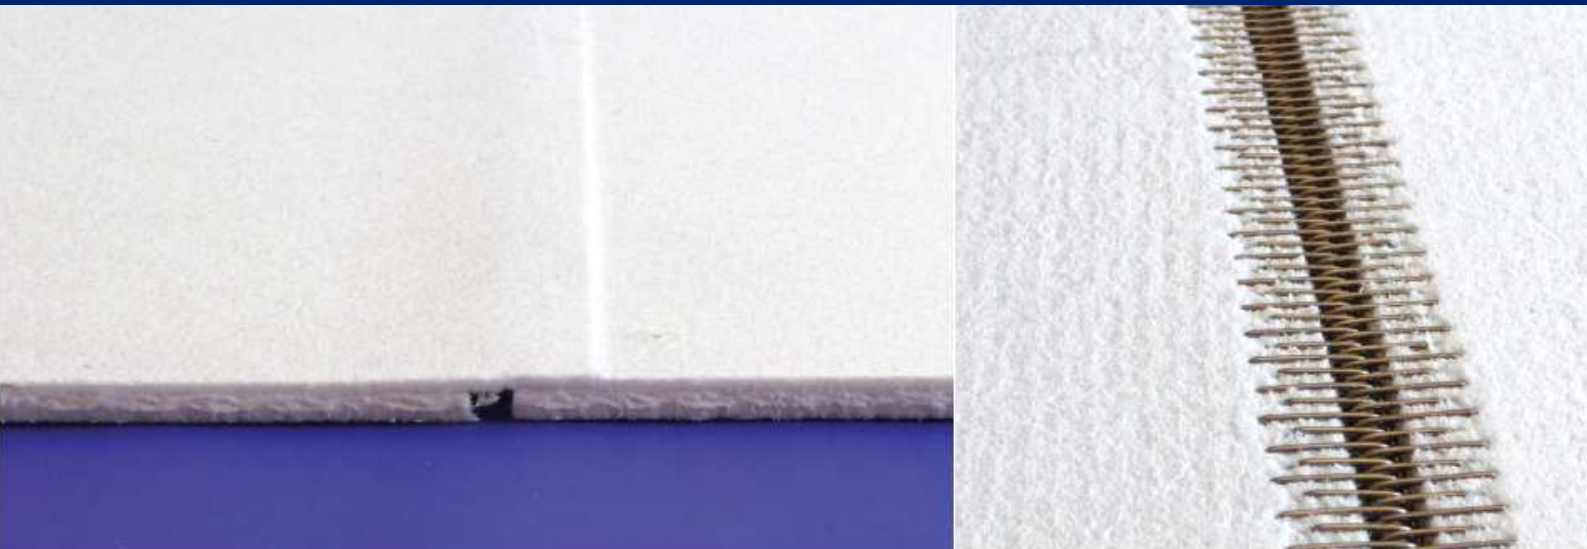

Technical Data

Polyester needled belt

- Weight: 4 200 g/m²
- Thickness: 8.5 mm
Perfect homogenous thickness
- Permeability: 600 m³/m²/h under 300 mm WG.
High permeability and porosity for optimum evaporation
- Porosity: 75 % board side
- Heat setting: High stability
- Guiding control at the end of the manufacturing process :
Provides optimum belt tracking on the machine
- Reinforced base: Additional 66 % traction resistance

Treatment and seam

- Treatment on board side :
Improves belt grip on board side and provides positive board drive
- Integrated seam :
Eliminates clip marks on the board
- Treated machine side : Low coefficient of friction

Options to improve belt performance

- Edge treatment:
Reduces edge wear in contact with hot plates
- Diagonal seam:
Reduces roll bounce for less noise, less marking and less maintenance costs.

BRICQ S.A.S.
D 62 Route d'Orgedeuil
16220 Montbron, France
Tel. +33 5 45 23 91 11
Fax +33 5 45 70 86 26

info@bricq.fr