


Belts

BRICQ TRACK L

This needled bottom belt is specially designed to improve pulling and has the best tracking properties. Its high-grip coating on board side prevents any risk of slippage on « difficult » board (coated board/white board) or heavy board. Its surface permeability allows a moisture and static electricity transfer and its porous surface eliminates the suction effect.

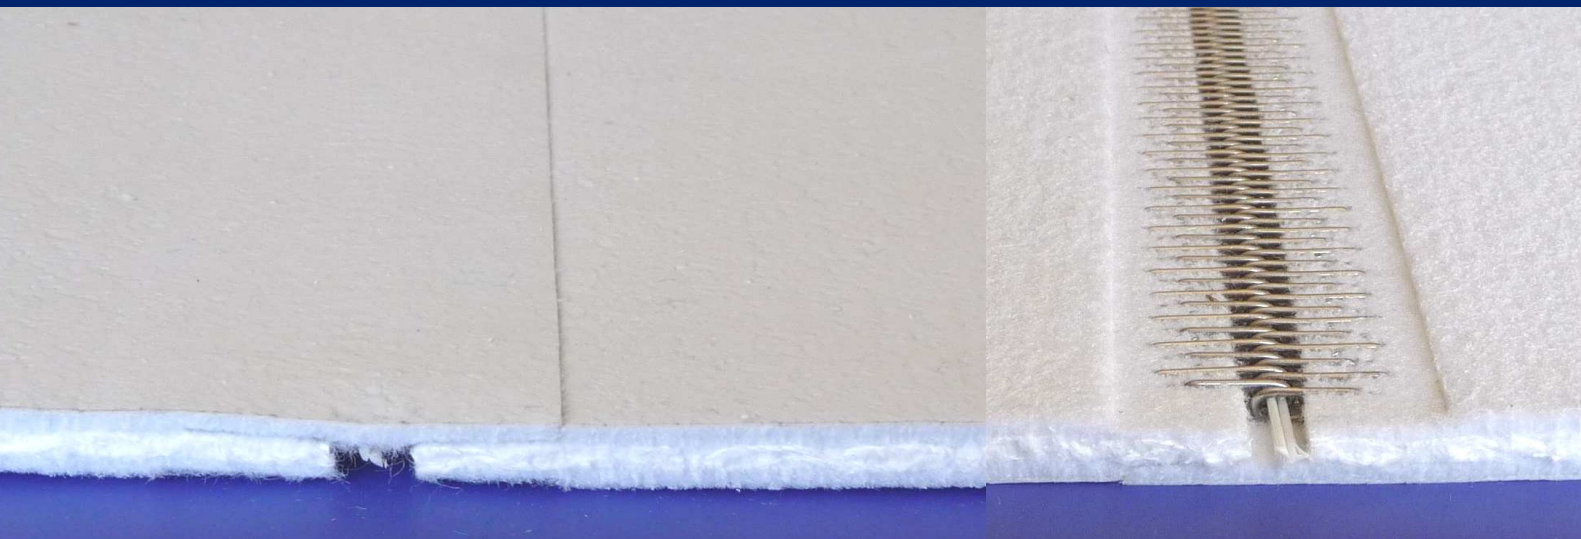

Technical Data

Polyester needled belt

- Weight: 4 750 g/m²
- Thickness: 8.5 mm
Perfect homogenous thickness
- Rupture strength : 300 daN/cm
- Coefficient of friction :
On paper side : 1.80
On machine side : 0.15
- Heat setting: High stability
- Guiding control at the end of the manufacturing process :
Provides optimum belt tracking on the machine

Treatment and seam

- Coating on board side :
Improves belt grip on board side and provides positive board drive
- Integrated seam :
Eliminates clip marks on the board
- Treated machine side : Low coefficient of friction

Options to improve belt performance

- Diagonal seam:
Reduces roll bounce for less noise, less marking and less maintenance costs.

BRICQ S.A.S.
D 62 Route d'Orgedeuil
16220 Montbron, France
Tel. +33 5 45 23 91 11
Fax +33 5 45 70 86 26

info@bricq.fr