

# Fibre cement fabrics

## FIBROTEC F250

Small to medium knuckled base designs for applications where improved levels of layer cohesion are required and a small degree of base-mark is acceptable.



### Technical Data

#### Finished characteristics


- Total weight: 1 600 or 1 700 g/m<sup>2</sup> +/- 7 %
- Length : Ordered length +/- 1 %
- Width : Ordered width +/- 1.5 cm
- Permeability: 90 CFM or 140 CFM +/- 20 %

#### Base fabric

- Weight : 700 g/m<sup>2</sup>
- Weave : Plain
- MD Yarn : Multiyarn PA
- CD Yarn : Twisted Monoyarn PA

#### Needling fibers

- 100 % synthetic PA
- Surface : 22 dtex
- Middle : 44 and 67 dtex
- Backside : 44 and 67 dtex

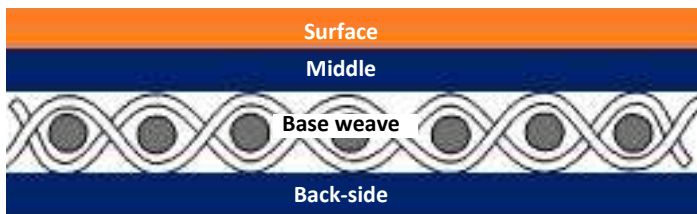

BRICQ S.A.S.  
D 62 Route d'Orgedeuil  
16220 Montbron, France  
Tel. +33 5 45 23 91 11  
Fax +33 5 45 70 86 26